




Kyoto City Internal Inundation Hazard Map Sakyō Ward

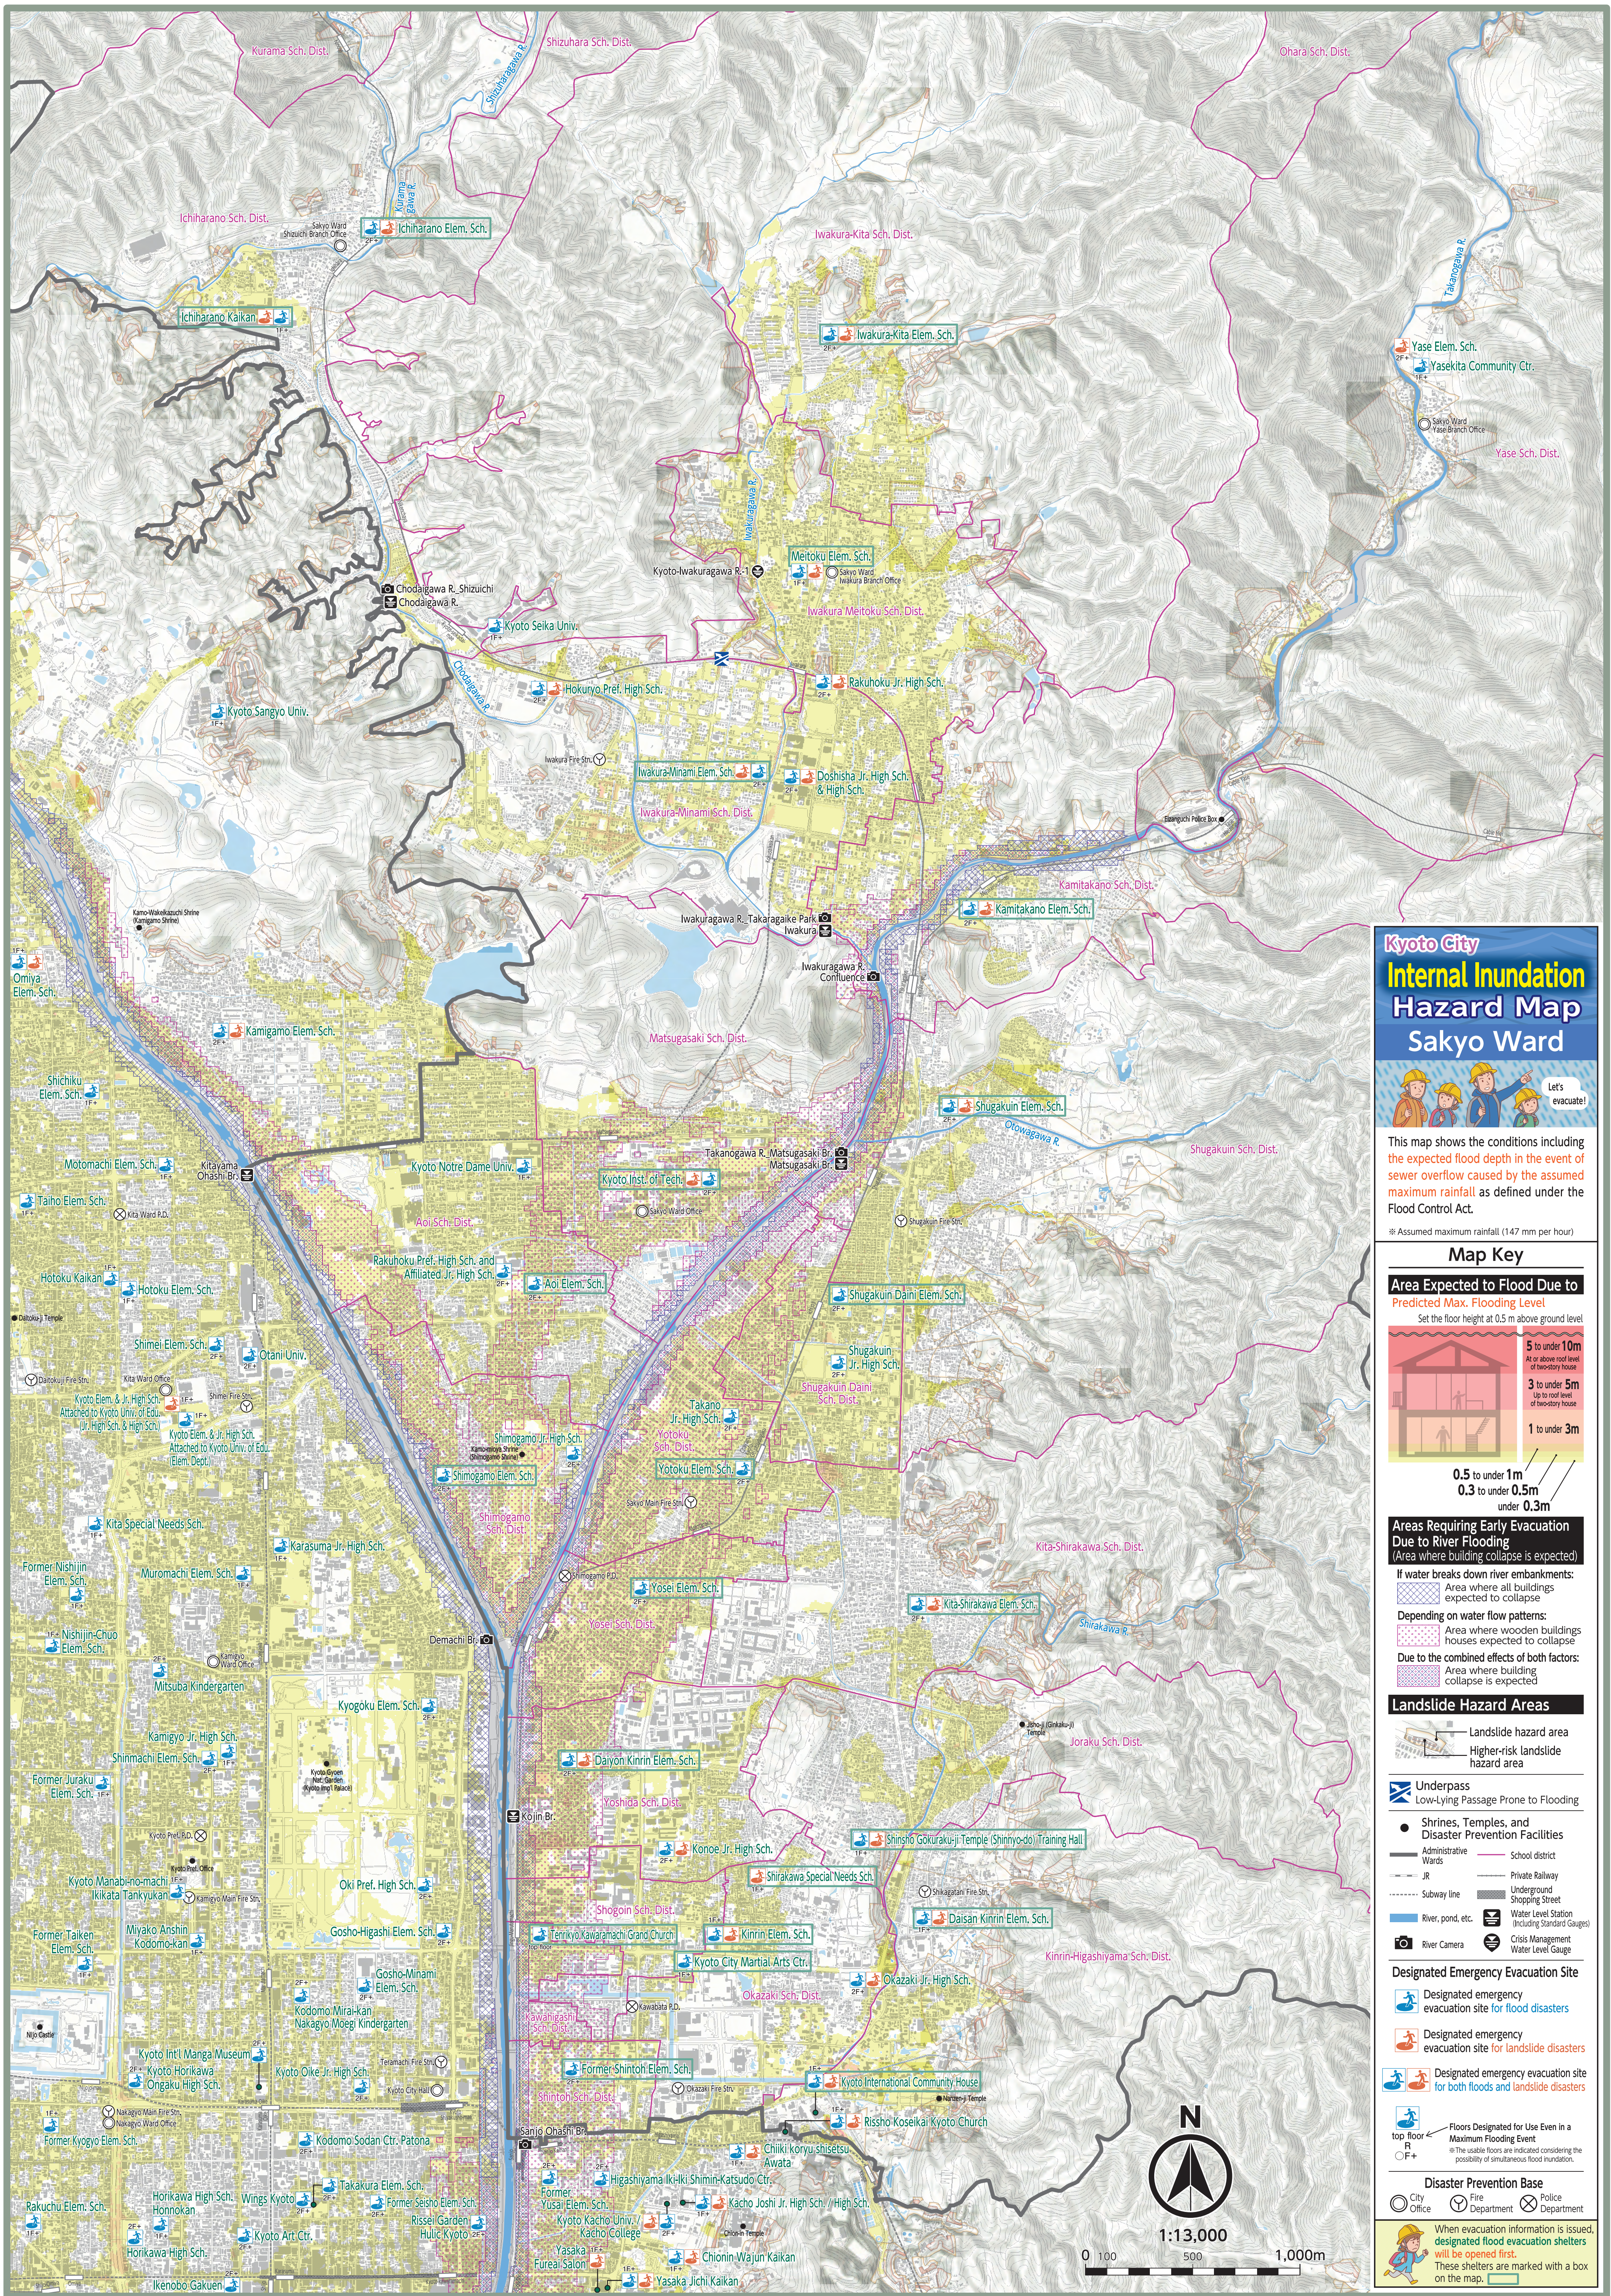


This map shows the conditions including the expected flood depth in the event of sewer overflow caused by the assumed maximum rainfall as defined under the Flood Control Act.

※ Assumed maximum rainfall (147 mm per hour)

Map Key

Area Expected to Flood Due to Predicted Max. Flooding Level

Set the floor height at 0.5 m above ground level

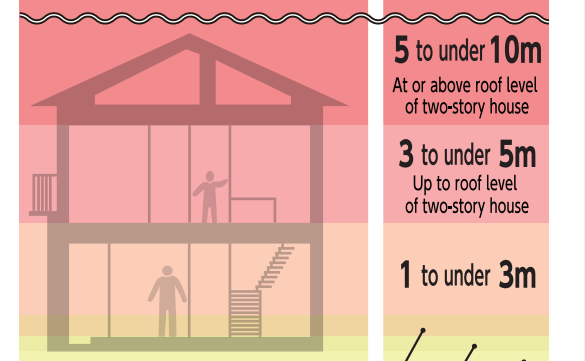

Areas Requiring Early Evacuation Due to River Flooding (Area where building collapse is expected)

If water breaks down river embankments:

Area where all buildings expected to collapse

Depending on water flow patterns:

Area where wooden buildings houses expected to collapse

Due to the combined effects of both factors:

Area where building collapse is expected

Landslide Hazard Areas

Landslide hazard area
Higher-risk landslide hazard area

Underpass
Low-Lying Passage Prone to Flooding

Shrines, Temples, and Disaster Prevention Facilities

Administrative Wards
JR
Subway line
River, pond, etc.
River Camera

School district
Private Railway
Underground Shopping Street
Water Level Station (Including Standard Gauges)
Crisis Management Water Level Gauge

Designated Emergency Evacuation Site

Designated emergency evacuation site for flood disasters

Designated emergency evacuation site for landslide disasters

Designated emergency evacuation site for both floods and landslide disasters

Floors Designated for Use Even in a Maximum Flooding Event
① The usable floors are indicated considering the possibility of simultaneous flood inundation.

Disaster Prevention Base
City Office
Fire Department
Police Department

When evacuation information is issued, designated flood evacuation shelters will be opened first. These shelters are marked with a box on the map.