

# Kyoto City Internal Inundation Hazard Map Eastern Fushimi Ward




This map shows the conditions including the expected flood depth in the event of sewer overflow caused by the assumed maximum rainfall as defined under the Flood Control Act.

※ Assumed maximum rainfall (147 mm per hour)

## Map Key

### Area Expected to Flood Due to Predicted Max. Flooding Level

Set the floor height at 0.5 m above ground level

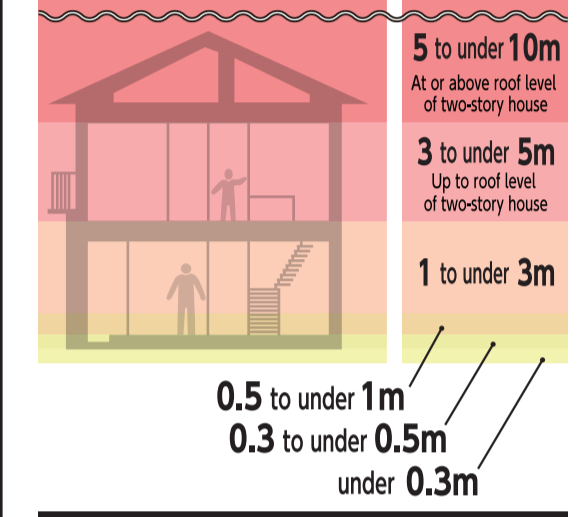

### Areas Requiring Early Evacuation Due to River Flooding

(Area where building collapse is expected)

- If water breaks down river embankments:
  - Area where all buildings expected to collapse
- Depending on water flow patterns:
  - Area where wooden buildings houses expected to collapse
- Due to the combined effects of both factors:
  - Area where building collapse is expected

### Landslide Hazard Areas

- Landslide hazard area
- Higher-risk landslide hazard area

### Underpass

Low-Lying Passage Prone to Flooding

- Shrines, Temples, and Disaster Prevention Facilities
- Administrative Wards
- School district
- Private Railway
- Subway line
- Underground Shopping Street
- River, pond, etc.
- Water Level Station (Including Standard Gauges)
- River Camera
- Crisis Management Water Level Gauge

### Designated Emergency Evacuation Site

- Designated emergency evacuation site for flood disasters
- Designated emergency evacuation site for landslide disasters
- Designated emergency evacuation site for both floods and landslide disasters
- Floors Designated for Use Even in a Maximum Flooding Event

### Disaster Prevention Base

- City Office
  - Fire Department
  - Police Department
- When evacuation information is issued, designated flood evacuation shelters will be opened first. These shelters are marked with a box on the map.

